




日成 型半爪加厚金属防水电缆接头




Thread: Metric/PG/NPT/G(PF)
Material: Brass, nickel plated
Claw: PA Seal/O-ring: silicon rubber
Certificates: CE, EX, ROHS
Tempe. range: -50°C to +150°C Protection: IP68.

单位/Unit:mm

型号				适用电缆 Cable Range Ø	标准型号 螺纹长度	加长型号 螺纹长度	接合长度 Joint Length	扳手 Spanner SW	包装 Std. Pkg.
公制螺纹	德制螺纹	美制螺纹	英制螺纹						
				3-6.5	6	12	19	14/14	100PCS
				4-8	7	12	20	18/18	
				5-10	7	12	22	20/20	
				6-12	8	12	23	22/22	
				10-14	8	12	23	24/24	
				10-14	9	13	23	28/24	50PCS
				11-17	9	13	23	28/28	
				13-18	9	13	23	30/30	
				13-18	11	15	32	36/30	
				15-21	11	15	32	36/36	
				18-25	11	15	32	40/40	4PCS
				18-25	11	15	32	44/40	
				19-28	11	15	32	44/44	
				22-32	11	15	32	50/50	
				22-32	11	15	38	54/50	
				30-38	11	15	38	58/58	1PCS
				30-38	11	15	38	58/58	
				34-44	14	18	38	64/64	
				34-44	14	18	38	68/64	
				45-55	15	20	45	81/81	
				45-55	15	20	50	81/81	100PCS
				60-70	20	25	50	96/96	
				60-70	20	25	50	96/96	
				3-6.5	6	12	19	18/14	
				5-10	7	12	22	20/20	
				6-12	7	12	23	22/22	50PCS
				10-14	8	12	23	24/24	
				10-14	8	12	23	28/24	
				13-18	11	15	23	36/30	
				15-21	11	15	32	36/36	
				13-18	11	15	32	36/30	4PCS
				15-21	11	15	32	36/36	
				18-25	11	15	32	40/40	
				18-25	11	15	32	40/40	
				19-28	11	15	32	44/44	
				22-32	11	15	32	50/50	
				22-32	11	15	32	50/50	
				30-38	11	15	32	58/58	
				30-38	11	15	38	58/58	
				34-44	14	18	45	68/64	

日成 型耐高温金属电缆防水接头

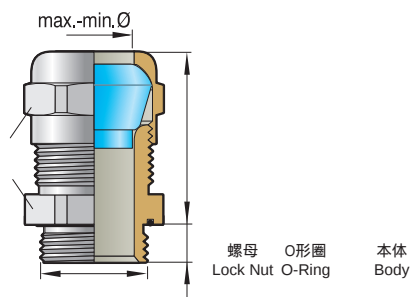

产品材质:金属:黄铜镀镍制成,橡胶:硅橡胶
 螺牙规格:M/PG/NPT/G(PF) 产品认证:CE,EX,ROHS
 工作温度:-50°C至250°C 防护等级:IP68
 使用方法:将本体固定机板,旋紧迫紧头即可固定电缆

Thread:Metric/PG/NPT/G(PF)
 Material:Brass,nickel plated Seal/Oring:silicon rubber
 Certificates:CE,EX,ROHS
 Tempe.range:-50°C to +250°C
 Protection:IP68。

型号				单位/Unit:mm							
公制螺纹	德制螺纹	美制螺纹	英制螺纹	适用电缆 Cable Range Ø	内层橡胶 with inlet	外层橡胶 without inlet			接合长度 Joint Length	板手 Spanner SW	包装 Std.Pkg.
				2-8	2-5	5-8	7	12	21	18	100PCS
				4-11	4-7	7-11	7	12	25	20	
				4-11	4-7	7-11	7	12	25	22	
				5-14	5-9	9-14	8	12	29	24	
				5-14	5-9	9-14	8	12	29	26	
				11-20	11-16	16-20	9	13	30	30	
				11-20	11-16	16-20	9	13	30	30	
				11-20	11-16	16-20	9	13	30	30	50PCS
				15-25	15-20	20-25	11	15	32	36	
				15-25	15-20	20-25	11	15	32	36	
				15-25	15-20	20-25	11	15	32	40	
				20-32	20-26	26-32	11	15	35	44	
				31-42	31-35	35-42	11	15	39	58	5PCS
				31-42	31-35	35-42	11	15	39	58	
				41-54	41-54	46-54	14	18	40	68	
				50-54	50-54	60-65	15	20	47	81	1PCS
				50-54	50-54	60-65	15	20	47	81	
				54-65	54-58	58-65	15	20	47	81	
				54-65	54-58	58-65	15	20	47	81	
				65-77	65-70	70-77	15	20	49	96	
				65-77	65-70	70-77	15	20	49	96	
				77-89	77-81	81-89	20	25	50	110	
				89-98	89-94	94-98	20	25	59	120	
				100-110	100-105	105-110	20	25	59	125	
				100-110	100-105	105-110	20	25	59	135	
				120-130	120-125	125-130	20	25	59	160	

日成 B L 型大范围加厚金属电缆防水接头