





NXR 系列热过载继电器



概述

适用范围		
● NXR	50Hz/60Hz	690V
●	0.1~630A	
●		
●	G/TB 14048.4/IEC 60947-4-1 GB/T 14048.5/IEC 60947-5-1	





结构特点		
●	NXR-200 NXR-630	10A
●		
●		
●		
●		
●		
●		
●	NXR-200 NXR-630	
●		
●	NXR-12 25 38 100	NXR-200 630

工作环境	
	3
	GB/T 14048.4/IEC 60947-4-1 GB/T 14048.5/IEC 60947-5-1
	CE CCC
	IP20 NXR-12 25 38 100 IP00 NXR-200 NXR-630
	-35 ~+70 -5 +40 24
	+35 " "
	2000m
	+70 50%
	20 90%
	±5°


型号说明

NXR 系列热过载继电器

快速选型与配合表

	A	RT16 A	
		gG	
 NXR-12	0.1~0.16	2	 NXC-06M 09M 12M
	0.16~0.25	2	
	0.25~0.4	2	
	0.4~0.63	2	
	0.63~1	4	
	1~1.6	4	
	1.25~2	6	
	1.6~2.5	6	
	2.5~4	10	
	4~6	16	
	5.5~8	20	
	7~10	20	
	9~12	25	
 NXR-25	0.1~0.16	2	 NXC-06 09 12 16 18 22 25 32 38
	0.16~0.25	2	
	0.25~0.4	2	
	0.4~0.63	2	
	0.63~1	4	
	1~1.6	4	
	1.25~2	6	
	1.6~2.5	6	
	2.5~4	10	
	4~6	16	
	5.5~8	20	
	7~10	20	
	9~13	25	
 NXR-38	23~32	63	 NXC-25 32 38
	30~38	80	
 NXR-100	23~32	63	 NXC-40 50 65 75 85 100
	30~40	100	
	37~50	100	
	48~65	100	
	55~70	125	
	63~80	125	
	80~93	160	
 NXR-200	80~160	315	 NXC-120 160 185 225
	125~200	315	
 NXR-630	125~250	800	 NXC-225 265 330 400 500 630
	200~400	800	
	315~630	800	

脱扣特性

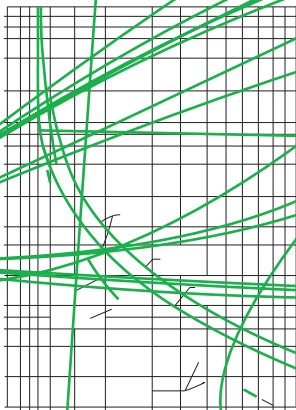

产品正面示意图

