





NXR 系列热过载继电器



概述

适用范围

- NXR 50Hz/60Hz 690V
0.1~630A
-
- G/TB 14048.4/IEC 60947-4-1 GB/T 14048.5/IEC 60947-5-1

结构特点

- NXR-200 NXR-630 10A
-
-
-
-
-
-
-
-
- NXR-200 NXR-630
-
- NXR-12 25 38 100 NXR-200 630

工作环境

	3							
	GB/T 14048.4/IEC 60947-4-1 GB/T 14048.5/IEC 60947-5-1							
	CE CCC							
	IP20	NXR-12	25	38	100	IP00	NXR-200	NXR-630
		-35	~+70			-5	+40	24
		+35						
	2000m							
		+70				50%		
						20	90%	
						±5°		



型号说明


快速选型与配合表



A		RT16 A	
		gG	
NXR-12	0.1~0.16	2	NXC-06M 09M 12M
	0.16~0.25	2	
	0.25~0.4	2	
	0.4~0.63	2	
	0.63~1	4	
	1~1.6	4	
	1.25~2	6	
	1.6~2.5	6	
	2.5~4	10	
	4~6	16	
	5.5~8	20	
	7~10	20	
	9~12	25	
	0.1~0.16	2	
NXR-25	0.16~0.25	2	NXC-06 09 12 16 18 22 25 32 38
	0.25~0.4	2	
	0.4~0.63	2	
	0.63~1	4	
	1~1.6	4	
	1.25~2	6	
	1.6~2.5	6	
	2.5~4	10	
	4~6	16	
	5.5~8	20	
	7~10	20	
	9~13	25	
	12~18	35	
	17~25	50	
NXR-38	23~32	63	
	30~38	80	
NXR-100	23~32	63	
	30~40	100	
	37~50	100	
	48~65	100	
	55~70	125	
	63~80	125	
	80~93	160	
NXR-200	80~160	315	NXC-120 160 185 225
	125~200	315	
NXR-630	125~250	800	NXC-225 265 330 400 500 630
	200~400	800	
	315~630	800	

产 正面





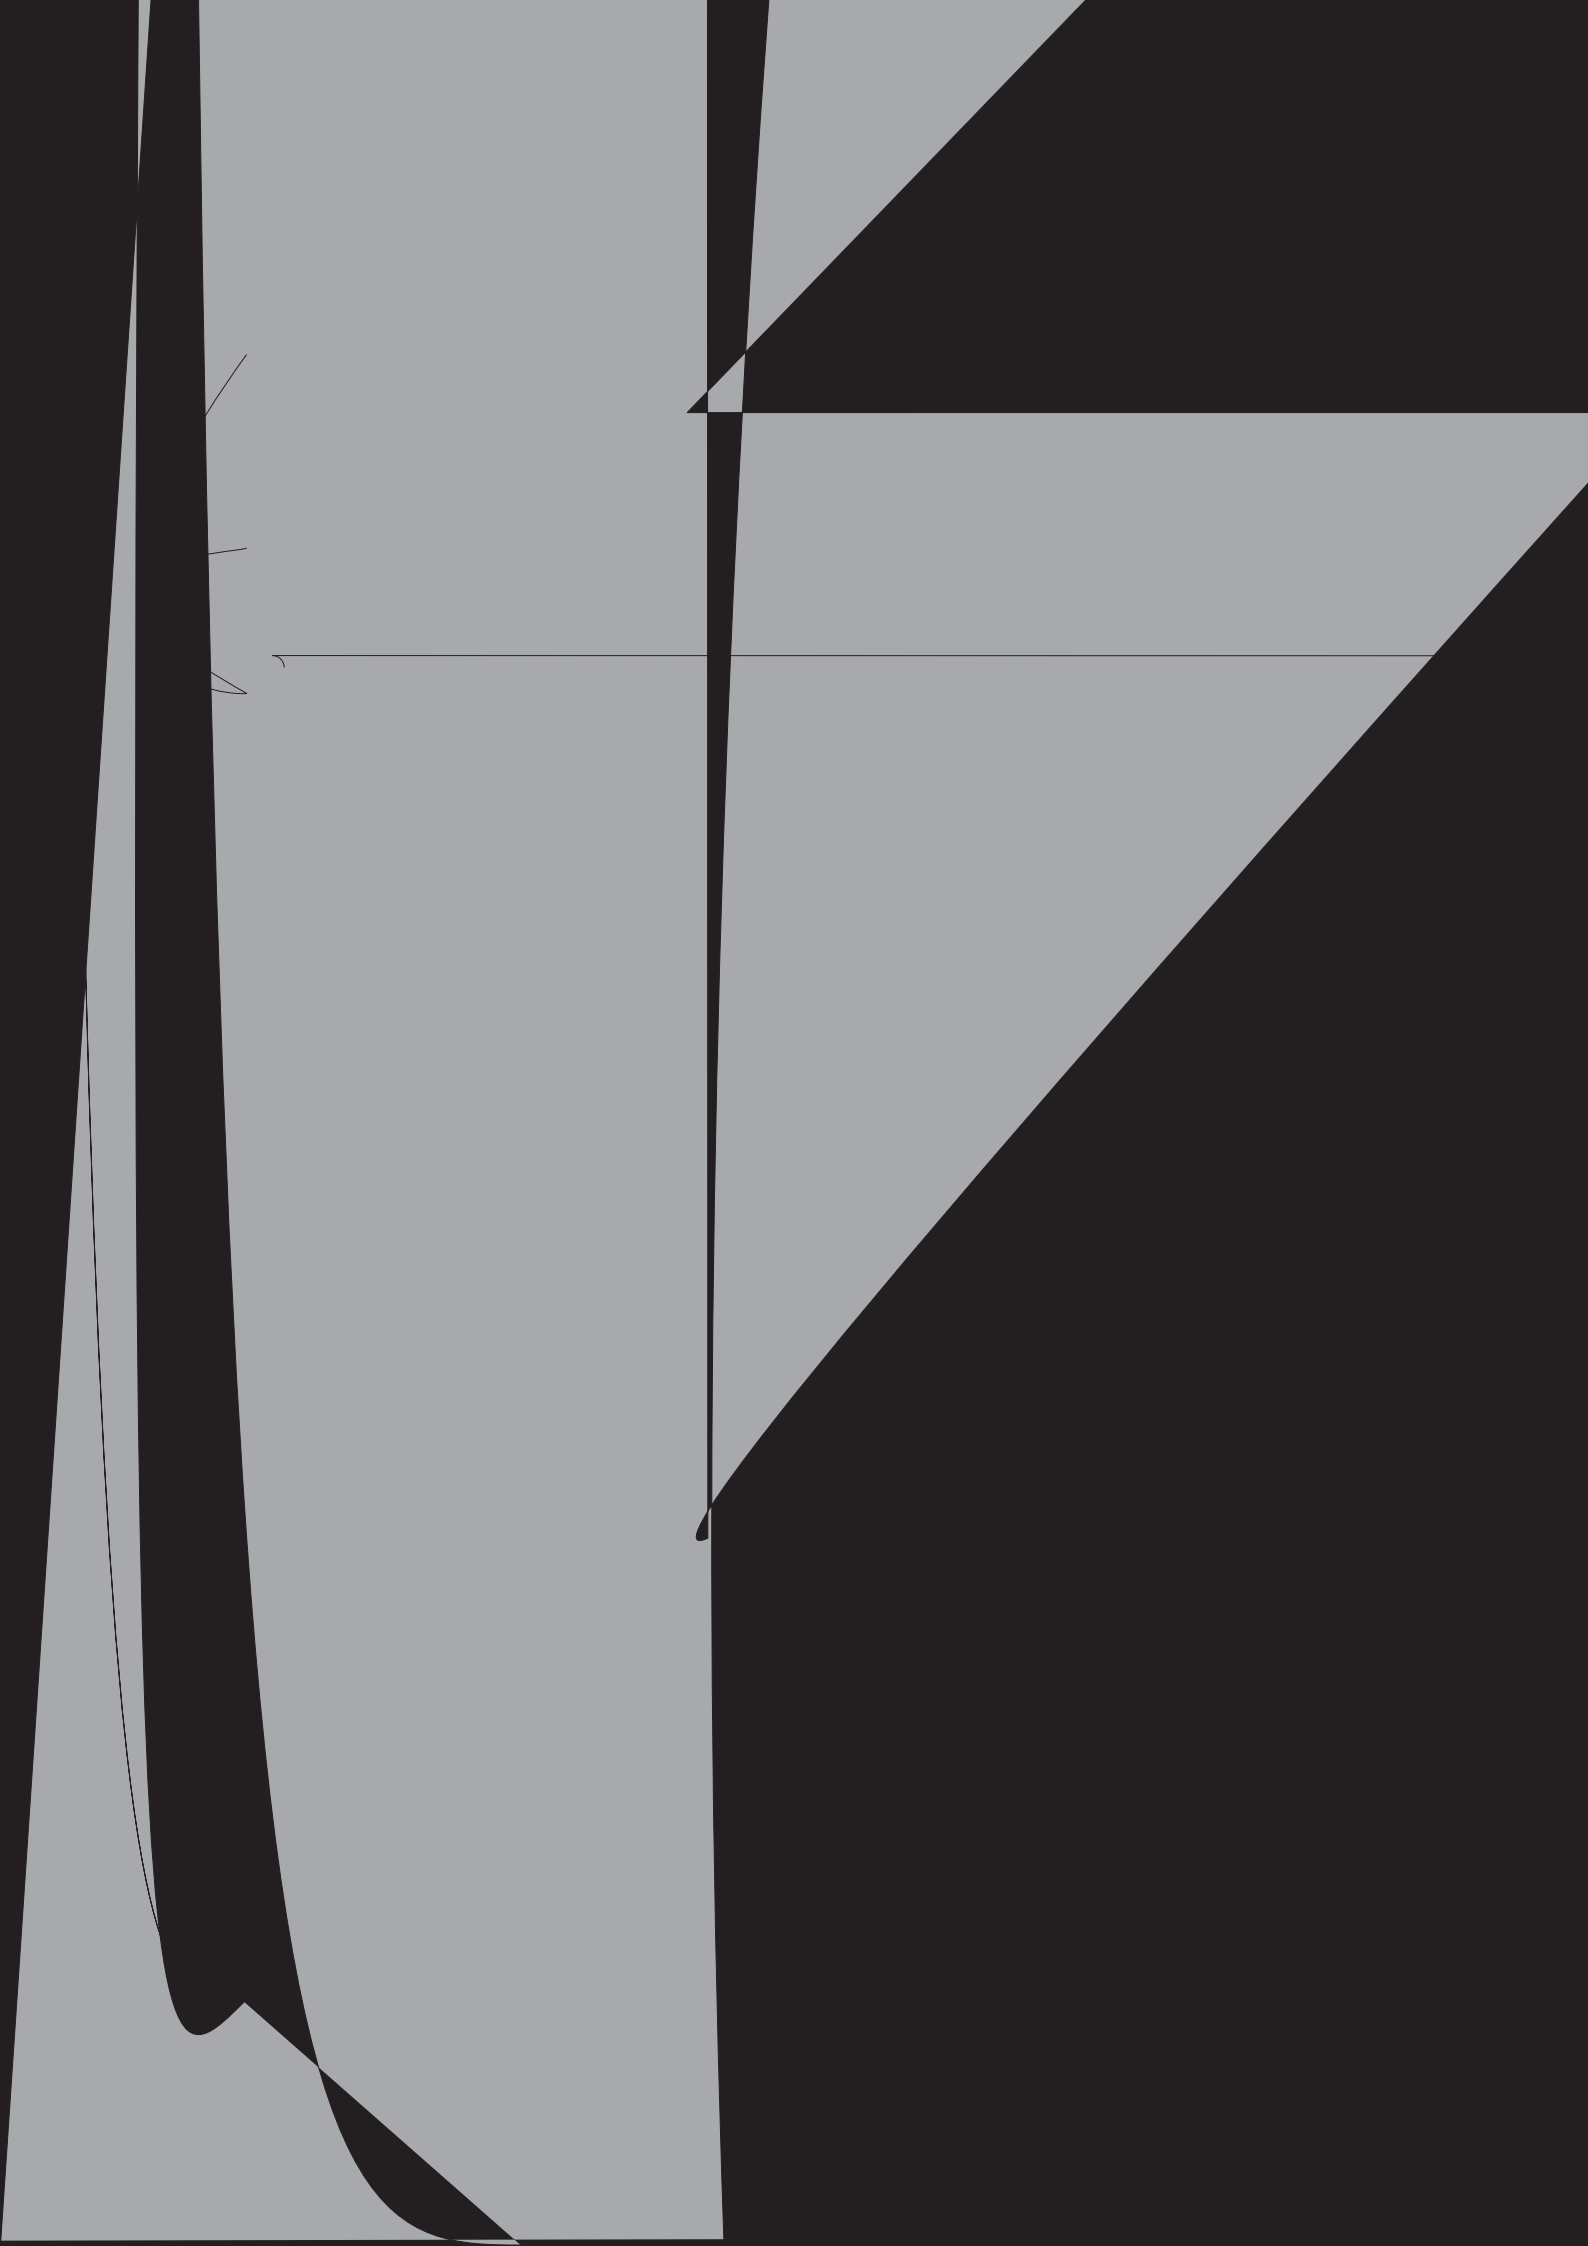

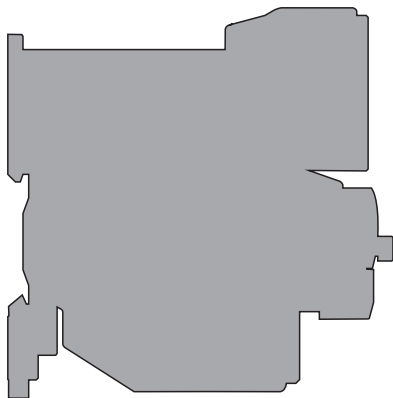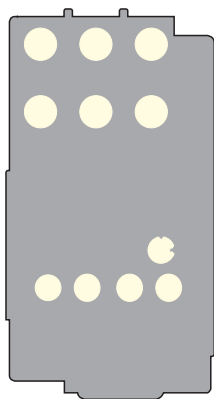

•

