

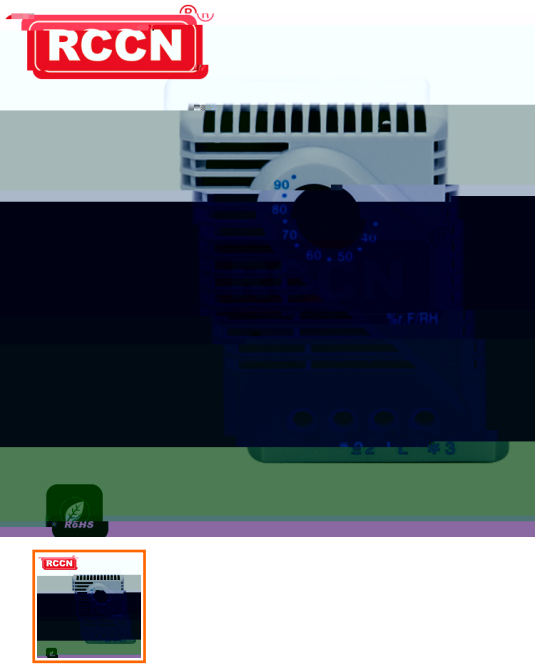


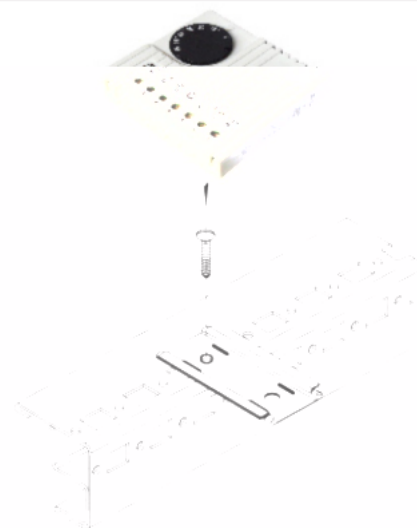

技术参数	型号	
	DSK3110.....	
工作电压	230/115/60/48/24V (AC) ,60/48/24V直流 (DC)	
感应元件	双金属片	
触电配置	单极转换触电作为瞬时开关元件	
允许触电载荷	K1.5-3(加热) 交流10 (4) A, 直流=30W; K1.5-4(加冷) 交流5 (4) A, 直流=30W;	
温度调节范围	+5°C~+60°C	
重量 (kg)	105	尺寸 (mm),
	711X71X33.5	开关差
	大约为1K正负0.8K	外壳材料
	ABS	保护等级
	IP20	认证
	CE	

技术指标

48V 60V N	24V N			(L1*) L	(L2*) 250V N	115V N
1	2	3	4	5	6	7

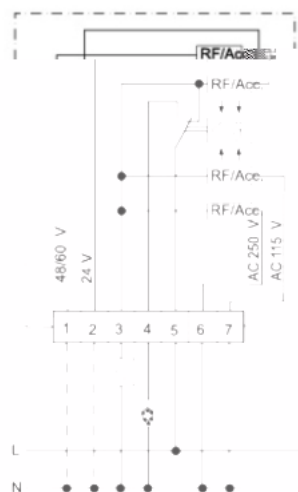

温度控制器

35mm导轨式安装

自动调节 转换容量高 CE认证 安装方便



高切换性能 恒温控制

突跳式双金属感应接触头



易于接线

方便快捷

性能可靠