




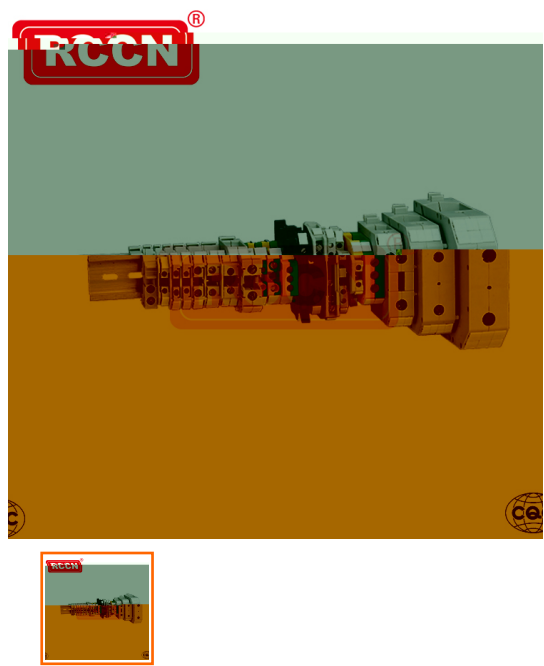

JCUK 系列

1 适用范围

JCUK系列适用于交流50Hz或60Hz，额定电压至额定电压额定电流至5000V的电路中作短路保护之用，并可在额定电流下长期运行。

符合标准 GB/T 19847-2005/IEC 60947-2-1。

JCUK-25N	JCUK-3N	JCUK-5N	JCUK-6N


JCUK-10N	JCUK-15N	JCUK-35N	JCUK-50N

JCUK-95N	JCUK-150N	JCUK-250N	JCUK-400N

JCUK-450N	JCUK-630N	JCUK-800N	JCUK-1000N

JCUK-1200N	JCUK-1600N	JCUK-2000N

2 外形及安装尺寸

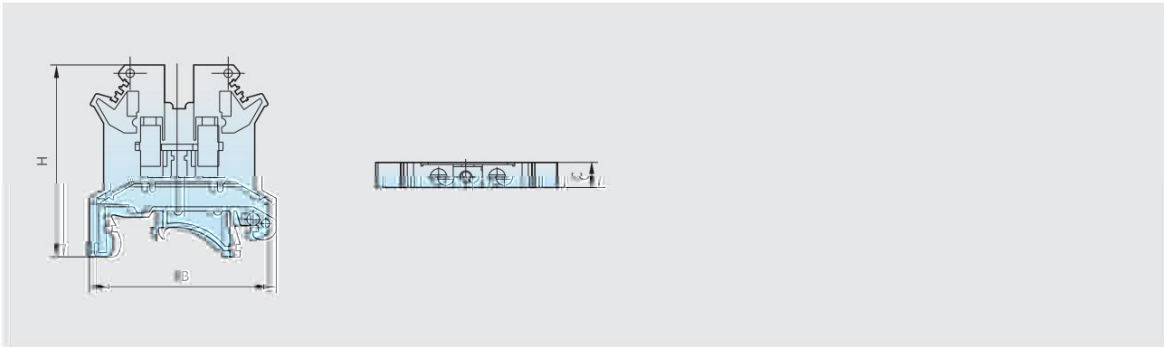

序号	产品名称	外形尺寸(mm)			备注
		B	C	H	
1	JCUK-2.5N	43	5.2	41	
2	JCUK-3N	43	5.2	46	
3	JCUK-5N	43	6.3	46	
4	JCUK-6N	43	8.2	46.5	
5	JCUK-10N	43	10.2	46.5	
6	JCUK-16N	43.5	12.2	51.5	
7	JCUK-35N	51	15.5	61.5	
8	JCUK-50H	76.5	20.5	76.5	
9	JCUK-95H	109	23.5	100.5	
10	JCUK-150H	140.5	33.5	112.5	
11	JCUK-25	73	13.3	53	
12	JCUK-35	87	17.7	63.5	
13	JCUK-45	94	22	69.5	
14	JCUK-60D	113	26.5	73.5	
15	JCUK-80D	138	34	86	
16	JCUK-100D	143	40.5	95.5	
17	JCUK-120D	143	44.4	99.5	
18	JCUK-150D	151	46.4	103.5	
19	JCUK-200D	173	51.5	117	熔断器规格500A额定电流表头60A
20	JCUK-250D	183	52.5	126.5	熔断器规格500A额定电流表头60A
21	JCUK-300D				
22	JCUK-400D				
23	JCUK-500D				
24	JCUK-600D				




Let Electricity Best

接线端子JCUK系列 TH35型导轨安装


保护用电安全



电压	品牌	名称	额定
	型号	频率	导轨

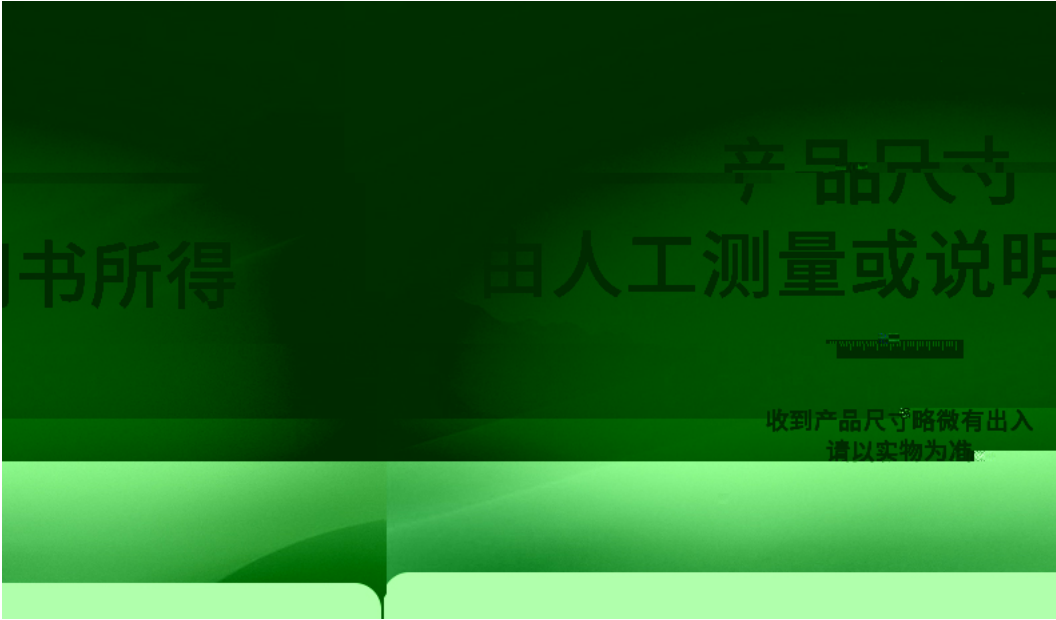

单位：mm

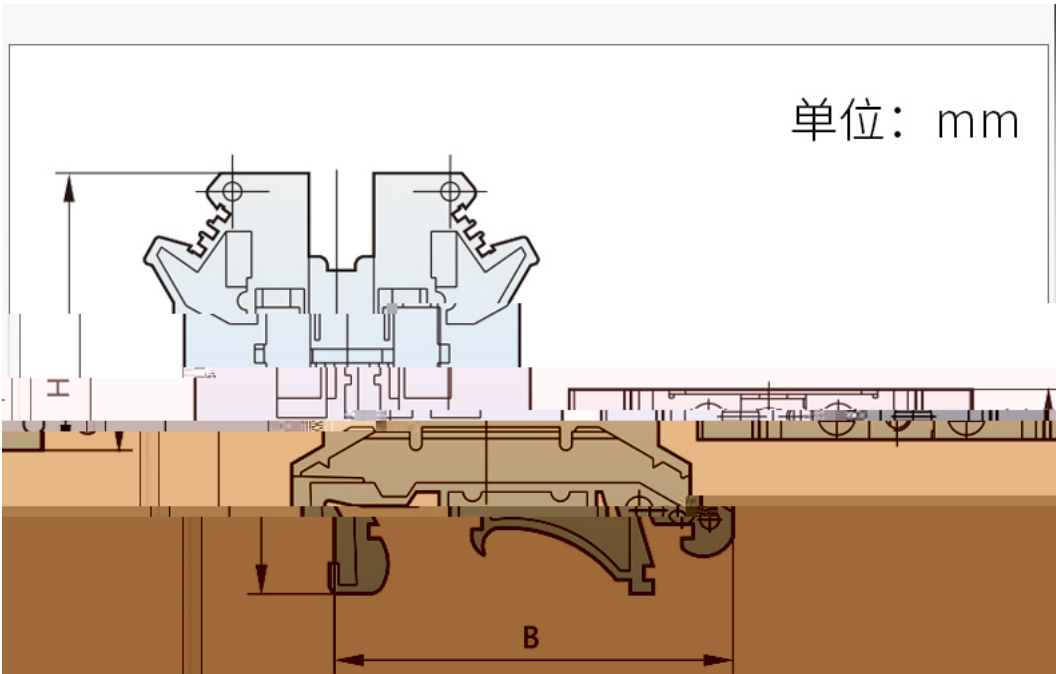

注：参数信息仅供参考，一切以实物为准。

型号规格	外形尺寸(mm ²)		
	B	C	H
JCUK-2.5N	43	6.2	41
JCUK-3N	43	5.2	46
JCUK-5N	43	6.3	46
JCUK-6N	43	8.2	46.5
JCUK-10N	43	10.2	46.5
JCUK-16N...	43.5	12.2	51.5
JCUK-35N	51	15.5	61
JCUK-50H	76.5	20.5	76
JCUK-95H	89	25.5	96
JCUK-150H	106	31.2	116



