




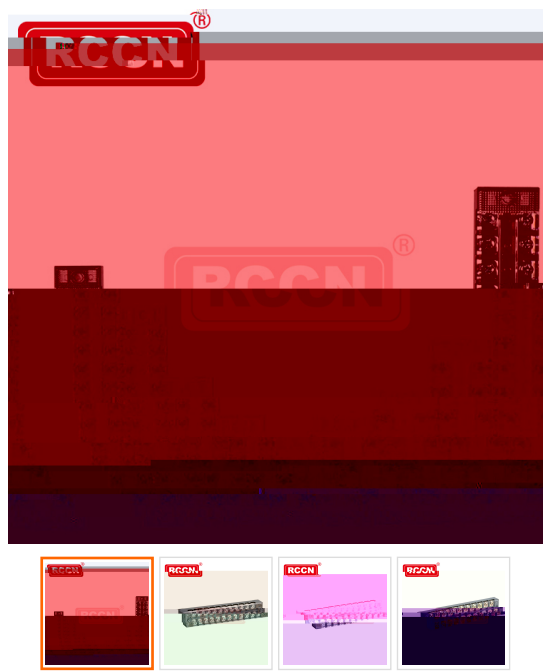

TB-1512

TB 系列

1 适用范围

TR系列适用于交流50Hz或60Hz,额定电压至600V,额定电流至100A的电路中,作汇
总线间的连接之用,本系列产品采用螺钉压接导线,导线端无需连接接线鼻即可直接
线端子连接。采用螺钉安装。

符合标准:GB/T 14048.7、IEC 60947-7-1。



TB-1503



TB-1504



TB-1506



TB-1508



TB-2503



TP04500+



TB-2504





TB-2506




TP04500-

序号	产品型号	额定 电流	组数	外形尺寸(mm)						安装方式	接线螺丝
				L	L1	D	E	F	G		
1	TB-1503	15A	3	45.5	35	22.2	18	4.2	7	螺钉固定	M3
2	TB-1504	15A	4	54.3	44	22.2	18	4.2	7	螺钉固定	M3
3	TB-1506	15A	6	72.5	62	22.2	18	4.2	7	螺钉固定	M3
4	TB-1510	15A	10	107.5	97	22.2	18	4.2	7	螺钉固定	M3
5	TB-1512	15A	12	126.2	115	22.2	18	4.2	7	螺钉固定	M3
6	TB-2503	25A	3	55.5	44.6	30.5	20	4.2	7	螺钉固定	M4
7	TB-2504	25A	4	67.5	56.5	30.5	20	4.2	7	螺钉固定	M4
8	TB-2506	25A	6	92	81	30.5	20	4.2	7	螺钉固定	M4
9	TB-4512	25A	12	163.8	152.6	30.5	20	4.2	7	螺钉固定	M4
10	TB-4503	45A	3	70.5	59.2	38	24	5	7.2	螺钉固定	M5
11	TB-4504	45A	4	86	75.6	38	24	5	7.2	螺钉固定	M5
12	TB-4506	45A	6	119.5	109	38	24	5	7.2	螺钉固定	M5
13	TB-4512	45A	12	220.5	209.5	38	24	5	7.2	螺钉固定	M5
14	TB-6003	60A	3	75	63	38	30.5	5	7.2	螺钉固定	M6
15	TB-6004	60A	4	93	81	38	30.5	5	7.2	螺钉固定	M6
16	TB-10003	100A	3	86.5	75	43.5	34.5	5	7.2	螺钉固定	M6
17	TB-10004	100A	4	108.5	97	43.5	34.5	5	7.2	螺钉固定	M6
18	TB-10004	100A	4	108.5	97	43.5	34.5	5	7.2	螺钉固定	M6

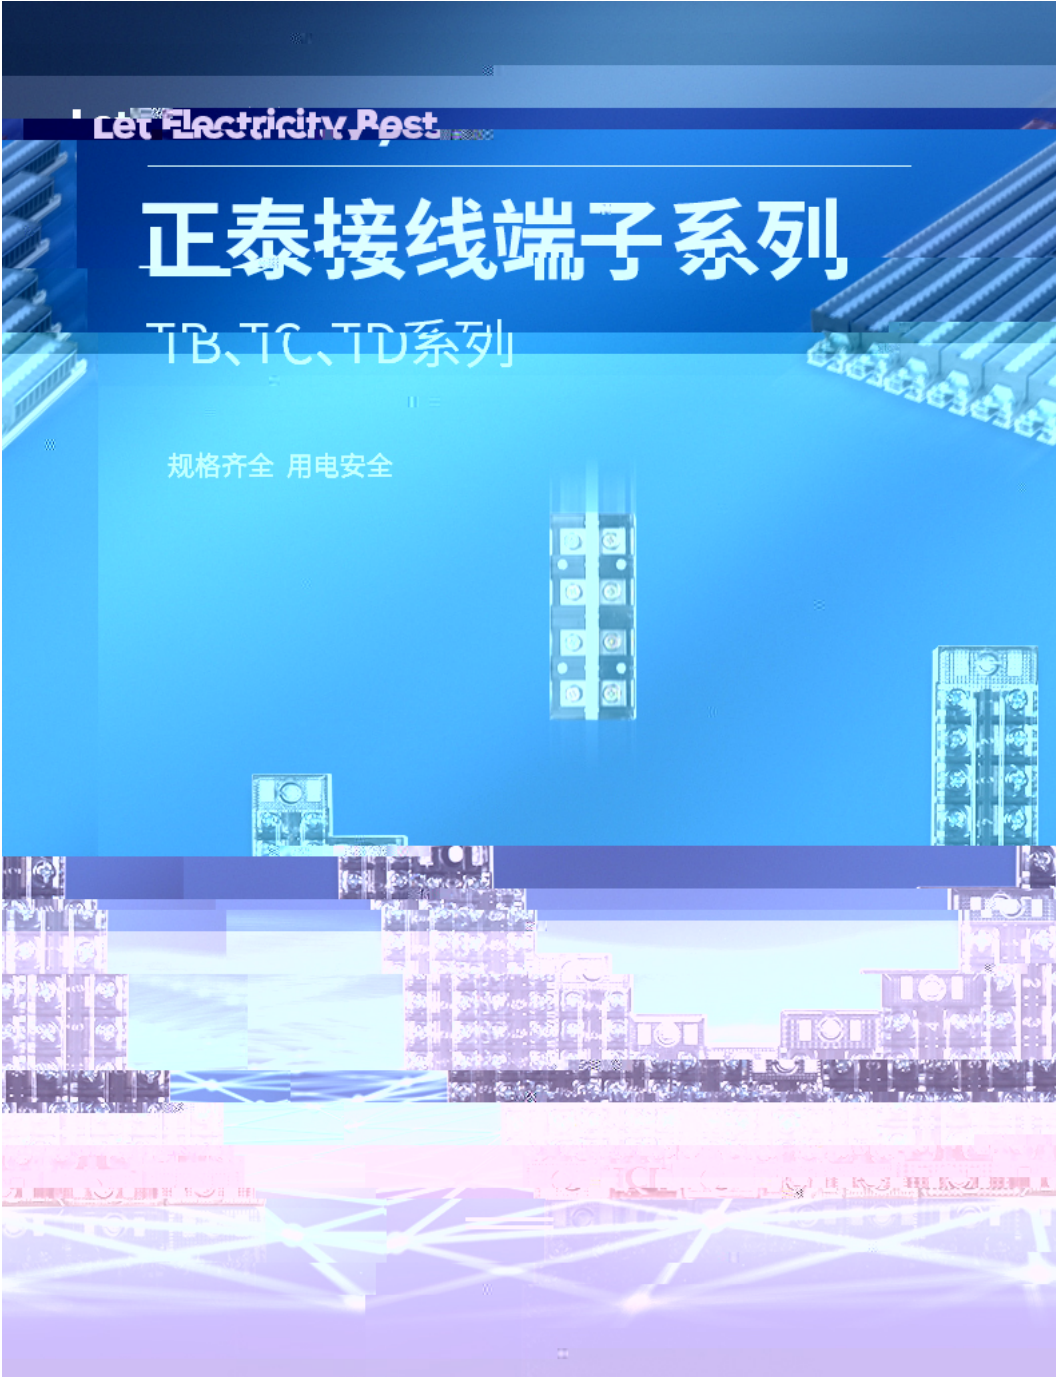

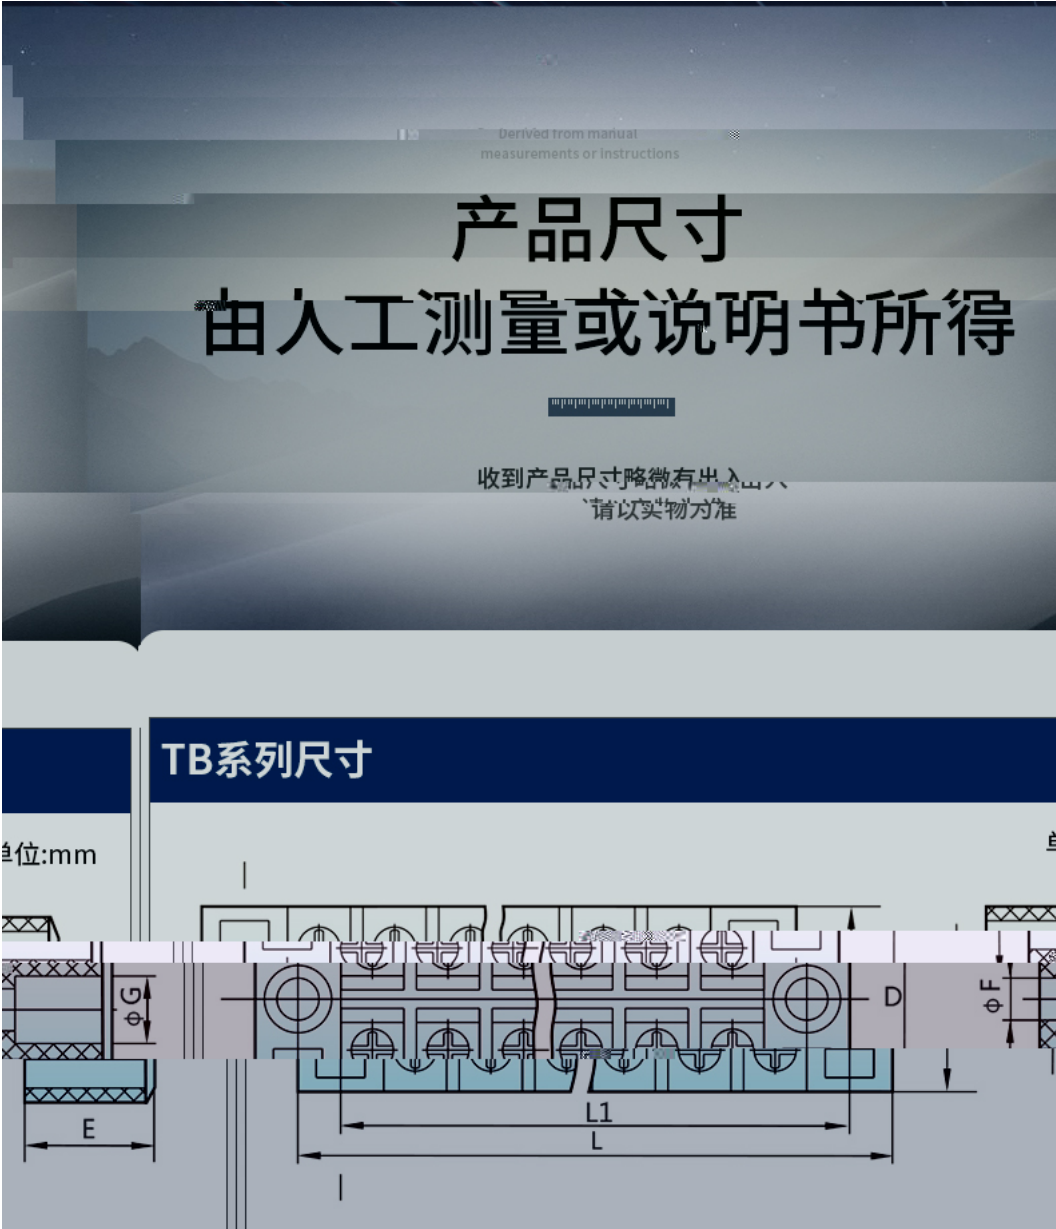

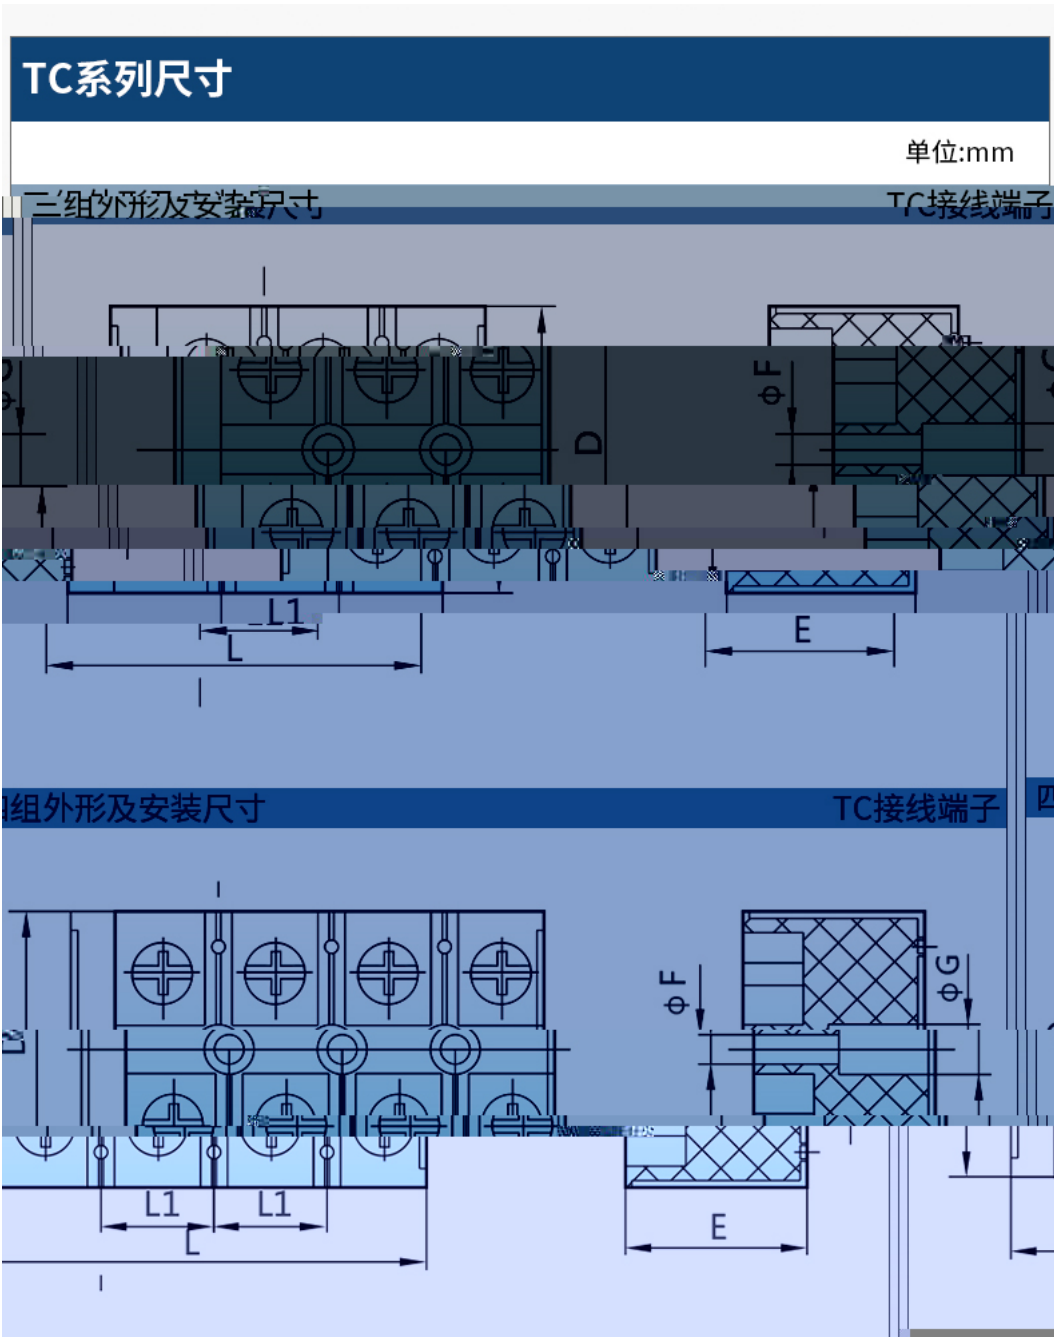

产口			型号		电流		组数		外形尺寸					
螺丝			型号		电流		组数		L	U	D	E	F	
9.6	M6		TC-603	60A	3	86	28.5	43	38	5.2				
9.6	M6		TC-604	60A	4	114.5	28.5	43	38	5.2				
9.6	M6		TC-1003	100A	3	103	34	55	42	5.2				
9.6	M6		TC-1004	100A	4	136	34	55	42	5.2				
11	M8		TC-1503	150A	3	115.3	38.5	66	46	6.3				
11	M8		TC-1504	150A	4	153.5	38.5	66	46	6.3				
11.2	M8		TC-2003	200A	3	132	44	72	51	7.9				
11.2	M8		TC-2004	200A	4	176.5	44	72	51	7.9				
11.2	M10		TC-3003	300A	3	165.5	55	90	58	7.9				
11.2	M10		TC-3004	300A	4	219.5	55	90	58	7.9				
9	11.2		M10	TC-4003	400A	3	165.5	55	90	60	7.9			
9	11.2		M10	TC-4004	400A	4	219.5	55	90	60	7.9			
5	12	M12	TC-6003	600A	3	206.5	68.5	100.5	80	8.8				
5	12	M12	TC-6004	600A	4	275.5	68.5	100.5	80	8.8				


TD系列尺寸

单位:mm

装轨型式	品型号	B	C	H
C	TD-10	30	6.1	20
C	TD-20	39	11.7	28.7
C	TD-30	43	14.3	34
C	TD-60	52	18.2	42



Derived from manual measurements or instructions

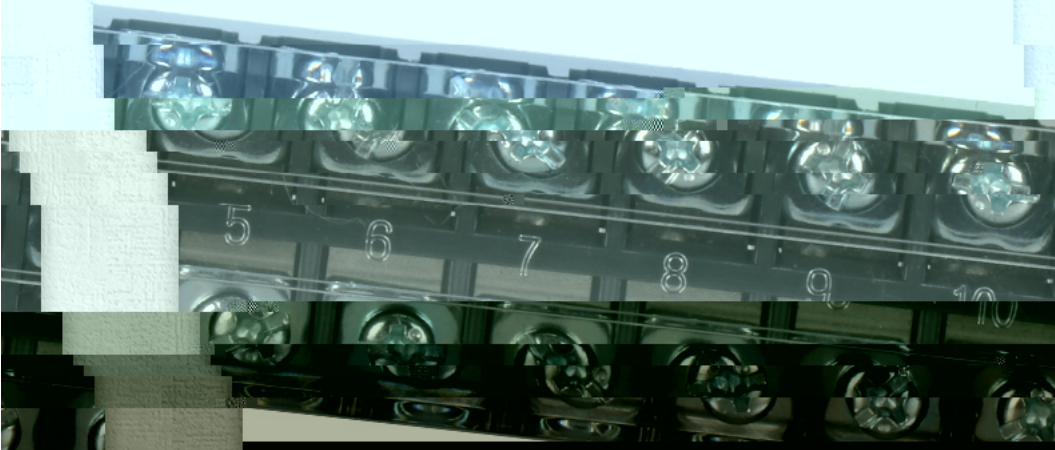

1.st ♥

真材实料，拒绝偷工减料



2.nd ♥

做工细致、 货真价实、



3.rd ♥

安全用电 寿命更长

产品展示

Please
Photographs of products

